

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/042538

International filing date: 17 December 2004 (17.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/585,186
Filing date: 02 July 2004 (02.07.2004)

Date of receipt at the International Bureau: 24 January 2005 (24.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

January 14, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/585,186

FILING DATE: *July 02, 2004*

RELATED PCT APPLICATION NUMBER: *PCT/US04/42538*



Certified By

Jon W Dudas

Under Secretary
of Commerce for Intellectual Property
and Acting Director of the
United States Patent and Trademark Office

070204

16711 U.S. PTO

PTO/SB/16 (04-04)

Approved for use through 07/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. **ER 286216024 US**


22154 U.S. PTO
607565186

070204

INVENTOR(S)					
Given Name (first and middle [if any])		Family Name or Surname		Residence (City and either State or Foreign Country)	
James W.		Cree		Chesterfield, VA	
Additional inventors are being named on the separately numbered sheets attached hereto					
TITLE OF THE INVENTION (500 characters max)					
BREATHABLE ELASTIC LAMINATE AND METHODS OF MANUFACTURING SAME					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number: 37158					
OR					
<input type="checkbox"/> Firm or Individual Name					
Address					
Address					
City		State		Zip	
Country		Telephone		Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages 11		<input type="checkbox"/> CD(s), Number			
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets 3		<input checked="" type="checkbox"/> Other (specify) Return Postcard			
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76		Check for \$160.00			
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE Amount (\$)	
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees.				160.00	
<input type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: _____					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

[Page 1 of 2]

Respectfully submitted,

SIGNATURE 

TYPED or PRINTED NAME Joseph E. Chovanes

TELEPHONE 610-648-3994

Date July 2, 2004

REGISTRATION NO. 33,481

(if appropriate)
Docket Number: 68-04

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT


This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Certificate of Express Mailing

DATE OF DEPOSIT: 7/2/2004

I HEREBY CERTIFY THAT THIS PAPER IS BEING SENT, VIA Express Mail, Label No. ER 286216024US,
Postage Prepaid, ON THE DATE INDICATED ABOVE, ADDRESSED TO
COMMISSIONER OF PATENTS, P.O. Box 1450, Alexandria, VA 22313.


JOSEPH E. CHOVANES

**BREATHABLE ELASTIC LAMINATE
AND METHODS OF MANUFACTURING SAME**

FIELD OF THE INVENTION

The present invention is related to breathable elastic laminates and their methods of manufacture. More particularly, the present invention is related to breathable elastic laminates comprised of nonwoven web materials and elastomeric members.

BACKGROUND OF THE INVENTION

Breathable elastic laminates are used in the manufacture of many goods. Providing a laminate that is both breathable and elastic may be difficult however. Moreover, some degree of liquid impermeability is often desired, which may add to the difficulty in manufacturing a desirable laminate. Other characteristics too may be desired, such as softness, drapeability, limited stretch, etc. Yet developing a laminate with all these characteristics is difficult.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a partial view of a preferred embodiment.

Figure 2 shows a partial view of a preferred embodiment.

Figure 3 shows a partial view of a preferred embodiment.

Figure 4 shows a partial view of a preferred embodiment.

Figure 5 shows a partial view of a process of a preferred embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention provides improved breathable elastic laminates and methods of making same. Articles of manufacture and uses are also taught herein.

Preferred embodiments comprise a nonwoven material such as is known in the art, incised with a plurality of incisions. This nonwoven material is then laminated to a elastomeric member. The lamination may occur through any process known in the art, such as vacuum lamination, adhesion (directly with the elastomeric member and/or with adhesive as is known,) etc.

By providing incisions to the nonwoven material, the mechanical characteristics of stretch and recovery are imparted to the material.

Preferred embodiments provide moderate to high elastic stretch and recovery. Of course, the stretch may be moderated as desired. In various preferred embodiments, the incisions are slits, and a nonwoven material with slits used in an especially preferred embodiment is produced by Lark Industries of South Korea, which has low pilling and fuzz properties. The nonwoven material with slits (hereinafter “preslit nonwoven material”) is then laminated to an elastomeric member, which may be elastic strands, elastic nonwoven, elastic film, elastic adhesive, or elastic tacky polymeric web. In latter especially preferred embodiments, elastic tacky polymeric web is co-extruded directly onto the preslit nonwoven material, while little or no tensioning force is present on the preslit nonwoven material.

This coextrusion occurs from a film die into a bonding stage. The bonding stage may be a vacuum lamination process, such as the vacuum lamination process described in U.S. Pat. No. 5,733,628 to James Pelkie, and can be used to produce a three-dimensional, apertured elastic layer. Thus, holes will be created in the elastic tacky polymeric web. In other embodiments, various lamination methods as known in the art may be used, such as

pressure lamination using adhesives, hot pin aperturing, ultrasonic or thermal bonding, etc.

In one embodiment of a laminate having the preslit nonwoven and an apertured film, air channels can be created both above and/or below the plane of the apertured film, providing the capability of tailorable breathability to the laminate.

The mechanical characteristics as imparted through incisions may be varied as desired. So for example, the slits of various preferred embodiments may be incised upon the nonwoven material in various numbers, patterns, locations and/or orientations, in order to provide predetermined characteristics. For example, predetermined stretch characteristics may be provided through particular numbers, patterns, locations and/or orientations of slits and/or other incisions. In other embodiments, the types of incisions themselves may be varied, for example, various shapes may be used as desired, (for example, thin rectangles, S-shaped curves, arcs, V-shapes, etc.) so long as desired predetermined parameters are imparted. Types may be mixed, as well as numbers, patterns, locations and/or orientations. Of course, incised regions may be interposed with nonincised regions as well, so as to provide zones or regions of extensibility to the laminate.

The modification of incisions (whether slits as in especially preferred embodiments or otherwise) and subsequent modification of predetermined parameters such as stretch characteristics, may be within a web intended for manufacturing a good. So for example, regions of varying stretch and/or other characteristics, (e.g. breathability) may be provided within a laminate for diaper product construction. Such a laminate might have zones of greater and lesser stretch, so that a part of the laminate to be used in

constructing a leg surround area would have greater stretch, while another part of the laminate to be used for covering a baby's backside would have lesser stretch. Similarly if the laminate is to be used in the diaper tabs for sealing, greater stretch would be imparted to the laminate, while lesser stretch might be desirable in a laminate used across the crotch span.

The laminates may be any number of layers as desired. So, for example, a two layer embodiment, as is described in various places herein, may be desirable. Figure 1 shows a cross section of a two layer embodiment. Preslit nonwoven material 2 and elastomeric member 4 are laid next to skin 6. Three or more layers may also be desired in various embodiments. Figure 2 shows a cross section of a three layer embodiment, with elastomeric member 8 present between preslit nonwoven 7 and 9. In multilayer (more than two layer embodiments) an elastomeric member may be sandwiched between two or more nonwoven layers, using methods as is known in the art, as, for example, shown in Figure 2. For example, a tacky elastomeric member may be used to adhere to a nonwoven layers on either side of the elastomeric member.

Additionally, laminates of various embodiments may vary in width. So for example, a thinner width across the web may be desirable, a broader width, etc. Also other characteristics, such as thickness of the laminate, basis weight of the layers, etc. may all be modified as desired.

Turning to Figure 3, an especially preferred embodiment is seen. Elastic tacky polymeric web 10 is extruded directly onto the preslit nonwoven material 20. Various slits are shown generally at 25. Machine direction is shown in the direction of arrow a. The laminate, shown generally at 30, may then be used as desired. Various embodiments

may provide extensibility of the laminate in the cross direction, machine directional, angularly with respect to either the machine or cross direction and/or a combination thereof, and thus biaxially extensible embodiments may be provided.

Figure 4 shows another embodiment. Nonwoven web 30 has a plurality of incisions (35, 36, 37 and 38, for example.) An elastomeric member (not shown) may then be laminated to nonwoven web 31. Machine direction is shown in the direction of arrow b.

In Figure 5 there is shown another apparatus generally indicated as 500 for forming nonwoven material into preslit nonwoven material. Apparatus 500 includes a pair of rolls 502, 504. Roll 502 includes a plurality of blade regions 506 that extend substantially parallel to a longitudinal axis running through the center of the cylindrical roll 502. Blade regions 506 include a plurality of blades 507. Roll 504 includes a plurality of blades 510 which mesh with tension regions 507 on roll 502. As a nonwoven material is passed between intermeshing rolls 502 and 504, the blades 507 will incise regions of the nonwoven material while leaving others untouched.

Alternatively, roll 504 may consist of a soft rubber, steel or other material. As the material is passed between bladed roll 502 and roll 504 the material will be incised as desired.

The laminate produced by various embodiments provides a generally cloth like appearance while possessing elasticity and recovery. Breathability is also provided, and embodiments may be sterilizable as well. Thus various uses may be made of these embodiments.

Various embodiments may be used in various types of articles, such as, for example adult, child or infant incontinence products (diapers, briefs, etc.), female menstrual products (e.g. sanitary napkins, pantliners, etc.), wraps, including sterile and nonsterile (e.g. bandages with and without absorbent sections,) as well as other disposable and/or multiple use products (e.g. other absorbent articles proximate to a human or animal body, bed sheets, apparel, including under- and outer-wear, medical drapes, medical gowns, packaging materials, protective covers, household, office, medical or construction materials, wrapping materials, etc.)

* * *

Although the present invention has been described with respect to various specific embodiments, various modifications will be apparent from the present disclosure and are intended to be within the scope of the following claims.

CLAIMS

1. A composite material comprising:

- a nonwoven web comprising a plurality of incisions; and,
- an elastomeric member;

wherein said elastomeric member is laminated to said nonwoven web material.

2. A composite material as in claim 1 wherein said incisions are configured within said nonwoven web according to predetermined parameters.

3. A composite material as in claim 2 wherein said predetermined parameters further comprise predetermined stretch characteristics of said composite material.

4. A composite material as in claim 1 wherein said plurality of incisions comprises a plurality of slits.

5. A composite material as in claim 1 wherein said nonwoven web material further comprises a low fuzz apertured nonwoven material.

6. A laminate comprising:

- a low fuzz apertured nonwoven material with at least one slit;
- an elastomeric member;

wherein said elastomeric member is laminated to said low fuzz apertured nonwoven material.

7. A laminate as in claim 6 comprising a plurality of slits.

8. A laminate as in claim 7 wherein said plurality of slits are present in a predetermined configuration.

9. A laminate as in claim 8 wherein said predetermined configuration further comprises predetermined stretch characteristics.

10. An absorbent article comprising:

- a breathable elastic laminate comprising a low fuzz apertured nonwoven material with at least one slit; and an elastomeric member wherein said elastomeric member is laminated to said low fuzz apertured nonwoven material.

11. An absorbent article as in claim 10 further comprising a female menstrual product.

12. An absorbent article as in claim 11 wherein said female menstrual product is a sanitary napkin.

13. An absorbent article as in claim 10 further comprising an incontinence product.

14. An absorbent article as in claim 10 further comprising an adult incontinence product.

15. An absorbent article as in claim 10 further comprising a child incontinence product.

16. An absorbent article as in claim 10 further comprising an infant incontinence product.

17. An absorbent article as in claim 10 further comprising a bandage.

18. An absorbent article as in claim 10 wherein said elastomeric member is partially laminated to said low fuzz apertured nonwoven material.

19. An absorbent article as in claim 18 wherein said elastomeric member is partially laminated to said low fuzz apertured nonwoven material so that air channels are provided between said elastomeric member and said low fuzz apertured nonwoven material.

20. An absorbent article as in claim 10 wherein said elastomeric member is comprised of styrene copolymer.

21. An absorbent article as in claim 10 wherein said low fuzz apertured nonwoven material is comprised of polyethylene.

22. A method for producing a laminate comprising:

- laminating a low fuzz apertured nonwoven material with a plurality of slits to an elastomeric member.

23. A method as in claim 22 wherein said elastomeric member is selected from the group consisting essentially of: elastic strand; elastic nonwoven; elastic film; elastic adhesive; or elastic tacky polymeric web.

24. A method as in claim 22 wherein said plurality of slits is provided to said low fuzz nonwoven apertured material in a predetermined pattern.

25. A method for providing stretch characteristics to a laminate comprising: providing at least one incision into a nonwoven web, and laminating said nonwoven web to an elastomeric member.

26. A method as in claim 25 further comprising providing a plurality of incisions.

27. A method as in claim 26 wherein said plurality of incisions comprise a plurality of slits.

28. A method as in claim 26 wherein said plurality of incisions are provided according to predetermined parameters.

29. A method as in claim 28 wherein said predetermined parameters are provided according to predetermined stretch characteristics.

30. A method for constructing an absorbent article comprising:

- laminating a low fuzz apertured nonwoven material with a plurality of slits to an elastomeric member.

31. A method as in claim 30 wherein said absorbent article comprises a female menstrual product.

32. A method as in claim 30 wherein said female menstrual product is a sanitary napkin.

33. A method as in claim 30 wherein said absorbent article comprises an incontinence product.

34. A method as in claim 30 wherein said absorbent article comprises an adult incontinence product.

35. A method as in claim 30 wherein said absorbent article comprises a child incontinence product.

36. A method as in claim 30 wherein said absorbent article comprises an infant incontinence product.

37. A method as in claim 30 wherein said absorbent article comprises a bandage.

38. A method as in claim 25 wherein said laminating further comprises coextruding a elastic tacky polymeric web elastomeric member onto said nonwoven material at little or no tension, after said incision has been provided into said nonwoven material.

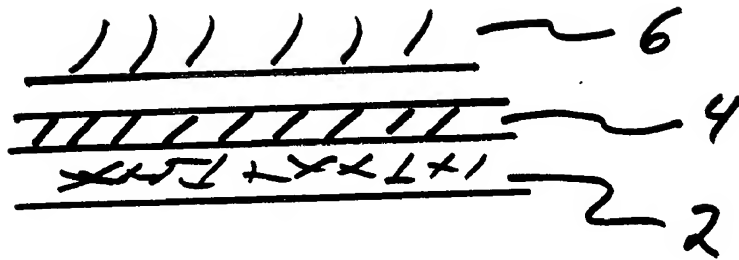


Fig. 2

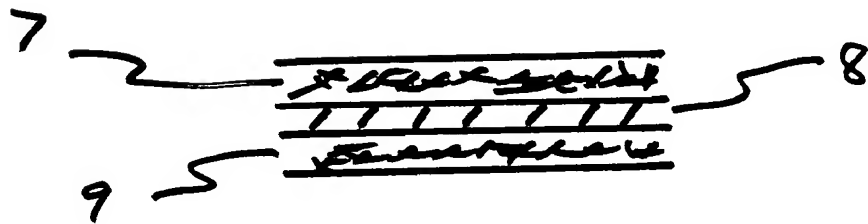


Fig. 2

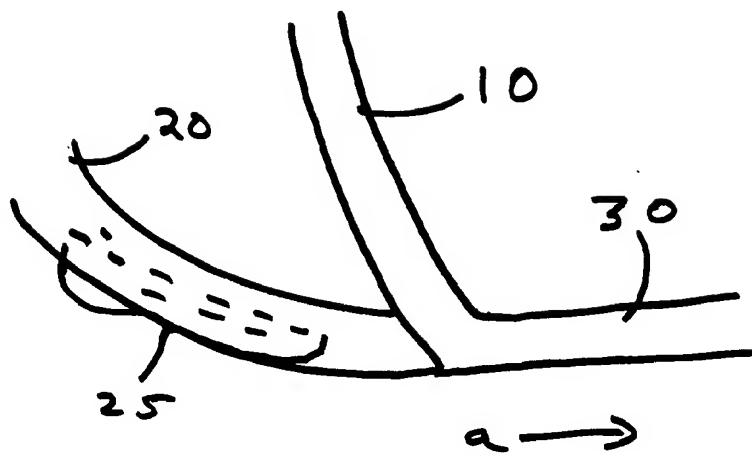


Fig. 3

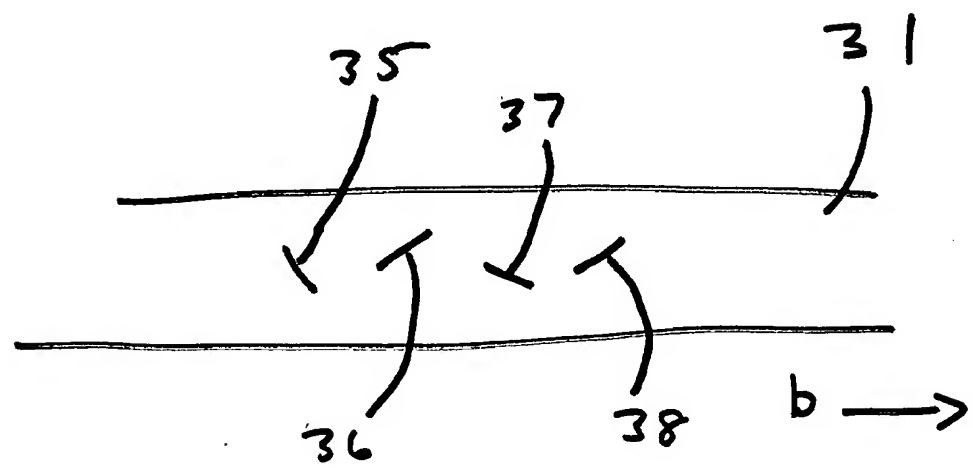


Fig. 4

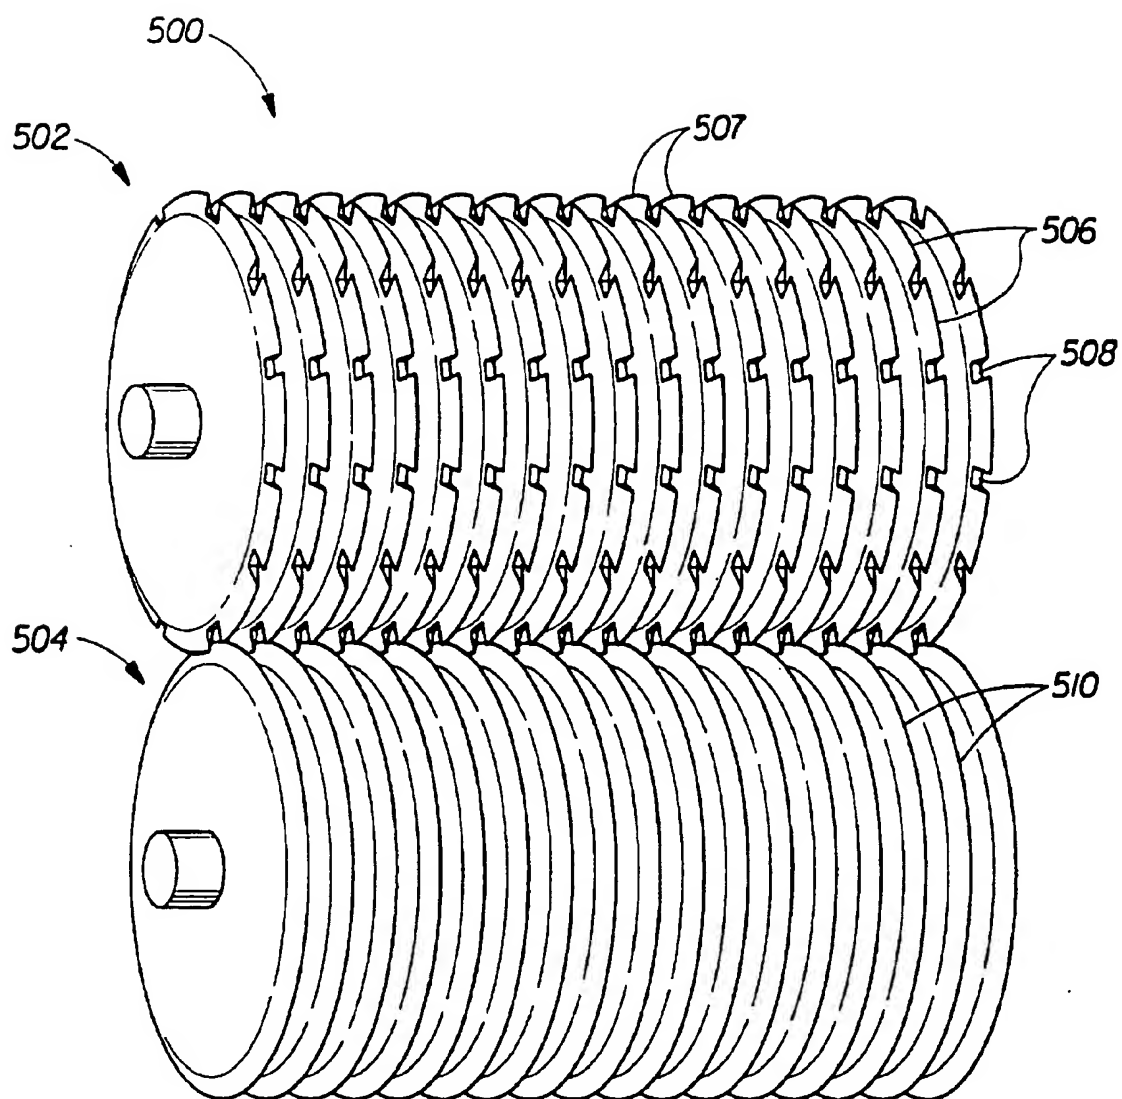


Fig. 5